


Ordering information

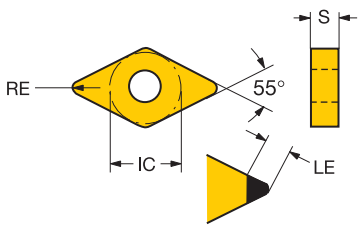

T-Max®P - CBN inserts with chip-breaker

T-Max® P - CBN inserts with chip-breaker



C-style insert (Rhombic 80°)

						H
						7025
		LE	S	RE	ISO CODE	
Roughing	12 1/2	3.50	4.76	0.8	CNGM120408F-HGR	★
		.138	.187	.031		
		3.50	4.76	1.2	CNGM120412F-HGR	★
		.138	.187	.047		



D-style insert (Rhombic 55°)

						H
						7025
		LE	S	RE	ISO CODE	
Roughing	15 1/2	3.50	4.76	0.8	DNGM150408F-HGR	★
		.138	.187	.031		
		3.50	4.76	1.2	DNGM150412F-HGR	★
		.138	.187	.047		

Head office:
AB Sandvik Coromant
SE-811 81 Sandviken, Sweden
E-mail: info.coromant@sandvik.com
www.sandvik.coromant.com

C-1040:222 en-GB © AB Sandvik Coromant 2018

