


## Handling instructions



# Silent Tools™ CoroMill® 390D



● ● ● ● **SilentTools®**

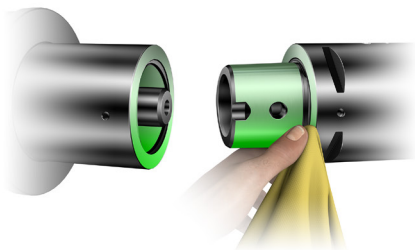

Coromant Capto size	Max torque	
	Nm	ft-lbs
C5	95	70
C6	170	125

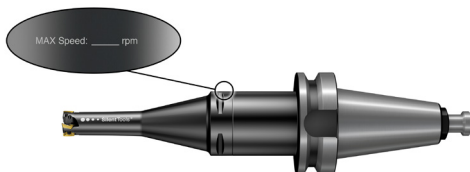

Head office:  
AB Sandvik Coromant  
SE-811 81 Sandviken, Sweden  
[www.sandvik.coromant.com](http://www.sandvik.coromant.com)  
E-mail: [info.coromant@sandvik.com](mailto:info.coromant@sandvik.com)



92024

© AB Sandvik Coromant  
2014.05